


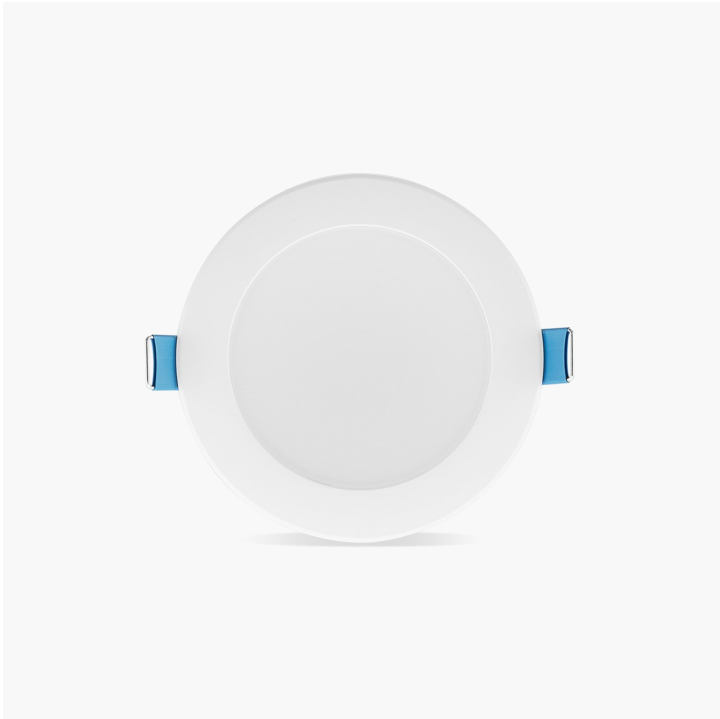

## GE Buddy LED Recessed CCT 90mm Cut Out Downlight in White

SKU: 170728

### Details

GE Buddy Dimmable CCT Downlight in White—a pinnacle of versatility and modern lighting technology. Featuring a generous 95-degree beam angle, the GE Buddy ensures expansive and even illumination, making it a perfect choice for a wide range of applications. Emitting a powerful 800 lumens, this downlight is designed to brighten your space effectively.

Choose the Kelvin temperature that suits your ambiance with options of 3000K, 4000K, and 6500K. Whether you prefer a warm, inviting glow or a crisp, daylight-inspired radiance, the GE Buddy lets you tailor the lighting to your preference.

Enjoy the convenience of dimmable lighting, allowing you to create the perfect atmosphere for any occasion.

### Specifications

|                     |                                                                                                                                                                          |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SKU                 | 170728                                                                                                                                                                   |
| Colour/Finish       | White                                                                                                                                                                    |
| Dimmable            | Yes                                                                                                                                                                      |
| Recommended Dimmers | Lucci LEDlux SKU# 290998, 290997, 299043, 290989, 290992, 290993, 290994. Buster + Punch SKU# 299098, 299099, 299100 299101. Artisan SKU#197015, 197016, 197017, 197018. |
| Ip Rating           | IP44                                                                                                                                                                     |
| Globe Type          | Integrated LED                                                                                                                                                           |
| Globe Quantity      | 0                                                                                                                                                                        |
| Wattage Max         | 6.5W                                                                                                                                                                     |
| Kelvins             | 3000K/4000K/6500K                                                                                                                                                        |
| Lumens              | 800                                                                                                                                                                      |
| CRI                 | 80                                                                                                                                                                       |
| Efficacy            | 123                                                                                                                                                                      |
| Beam Angle          | 95 degrees                                                                                                                                                               |

|                               |                                 |
|-------------------------------|---------------------------------|
| Average Rated Life            | 25,000 hours                    |
| Cut Out Size (mm)             | 90                              |
| Ic (Insulation Contact) Rated | IC-4                            |
| Colour Temperature            | Warm White/Cool White/Day Light |
| Material                      | ABS                             |
| Voltage                       | 240V                            |
| Surge Protection              | 500V                            |
| Double Insulated              | false                           |
| Sdcm                          | =6 (2700K/6500K)                |
| Operating Temperature         | -20 degrees to 40 degrees       |
| Ambient Temperature           | 25 degrees                      |
| Warranty                      | 3 years                         |
| Brand                         | GE                              |
| Style                         | Modern                          |
| Down Lighting Type            | SMD LED                         |
| Downlight Technology          | Scene Change via Toggle         |